

From Trunk to FTTX - The Next Generation

SPECIFICATIONS:

Item	Specification
Fiber Types	SMF, MMF, DSF, NZDSF
Cladding Diameter	125µm
Coating Diameter	250µm to 900µm for single fiber 280µm to 400µm for ribbon (thickness) [S122M4. S122M8. S122M12]
Average Splice Loss	SMF: 0.05dB, MMF: 0.03dB DSF: 0.08dB, NZDSF: 0.08dB
Splice Time	13 sec. (S122A), 15 sec. (S122M4. S122M8. S122M12)
Heat Time	Single Fiber: 37 sec. (40mm), 51 sec. (60mm) Ribbon Fiber: 45 sec. (40mm)
Tension Test	1.96N
Applicable Sleeve Length	40/60mm
Program Memory	Splice Programs: Max. 150 Heat Programs: Max. 12
Splice Memory	Max. 1,500 (S122A. S122M4), Max. 1,000 (S122M8. S122M12)
Fiber Image Display	Simultaneous two-axis display Magnification 120X (S122A), 48X (S122M4), 28X (S122M8. S122M12)
Dimensions	140W x 189L x 73H mm (S122A. S122M4), 140W x 189L x 86H mm (S122M8. S122M12)
Weight	800g/1.8lb. (S122A. S122M4), 960g/2.1lb. (S122M8. S122M12), 170g/0.4lb. (battery)
AC Input	100 to 240VAC
DC Input	13~18V
Battery Capacity	50 splices with heat shrink protection (122A. S122M4), 40 splices with heat shrink protection (122M8. S122M12)
Operating Temp.	-10°C to + 50°C
Storage Temp.	-40°C to + 60°C

S122 SERIES Hand-Held Fusion Splicer



S122M4

THE FURUKAWA ELECTRIC CO., LTD.

Head Office:
2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo, 100-8322, Japan
TEL: +81 3 3286 3222
FAX: +81 3 3286 3708
www.furukawa.co.jp/english/
comsales@ho.furukawa.co.jp

Europe:
Furukawa Electric Europe Ltd.
3rd Floor, Newcombe House
43-45 Notting Hill Gate,
London W11 3FE U.K.
TEL: +44 20 7313 5320
FAX: +44 20 7313 5310
www.furukawa.co.uk
sales@furukawa.co.uk

North & South America:
Furukawa America, Inc.
200 Westpark Drive, Suite 190
Peachtree City, GA 30269
TEL: +1 770 487 1234
FAX: +1 770 487 9910
www.FurukawaAmerica.com
splicers@FurukawaAmerica.com

South East Asia:
Furukawa Electric Singapore Pte. Ltd.
10 Anson Road, #25-07/08,
International Plaza, Singapore 079903
Tel: +65 6328 9896
Fax: +65 6224 2362
admin@furukawa.com.sg

China:
Beijing Look-World Tech Co., Ltd.
Room 5A02, Building 3,
Zhubang 2000 Business Center,
No.100 West Balizhuang,
Chaoyang District,
Beijing 100025 China
Tel: +86 10 8458 4888 107
Fax: +86 10 8586 9400
www.lookworld.com.cn/
sales@lookworld.com.cn

With its super low profile and new user interface, the Fitel S122 series fusion splicer offers next generation workability for every splicing field, FTTH, LAN, backbone, or long-haul installations. Combining the portability, power flexibility and field ruggedness of FITEL's previous generation of hand-held splicers with the proven quality and performance of our ribbon splicers, the S122 delivers fast and consistent splicing with outstanding mobility and extreme ease-of-use.

KEY FEATURES:

Superb Mobility and Workability

Super low profile design, with only 4.7cm height at the keypad, the S122 provides a stable working environment both on the work bench and palmtop. Attaching the S122 to the Work Table (optional) enables hands-free operation, as well as easy access to various work fields by folding the splicer upward.

Rugged Body

The top body and windshield are made of magnesium die-cast. The bottom body is protected with rubber corner pads. With its simple and flat shape, the S122 can survive during harsh conditions.

New GUI & LCD Screen

Featuring a new GUI (graphical user interface) and transreflective LCD screen technology, the S122 operation is a snap! Function keys are simple and information displays are crisp and clear even in direct sunlight.

Multi-Window Fiber Display

The LCD display shows the splicing process with simultaneous X and Y camera views, as well as status icons monitoring the machine conditions.

Fast and Accurate

The fast 13-second splice time and 37-second heat time creates a highly efficient work environment. The S122 observes the fiber from 2 directions just as all high-end splicers, promising high quality splice from trunk to FTTH.

Enhanced Ease of Use

Memory for fiber image, counters for cleaver and stripper blade replacement and visual maintenance instructions are provided for your ease of use.

Real Time Arc Control (S122M8 and S122M12 only)

Patented process which increases consistency and reduces splice loss. Also, virtually eliminates the need for traditional arc checks by actively calibrating the arc during each splicing cycle.

Fiber Clamp Vibration System (S122M8 and S122M12 only)


New fiber clamp vibration system allows for easy fiber placement. System inspects axis offset before each splice and makes necessary adjustment for ideal splicing.

Automatic Fiber Count Identification (S122M8 and S122M12 only)

Unit automatically identifies fiber ribbon count and selects the proper program for splicing. There is no need to manually change the program when operators want to splice different fiber counts.

PRODUCT LINE UP:

Model	Application
S122A	Splicing for single fiber using Fiber Holder System
S122M4	Splicing for single fiber to 4-fiber ribbon using Fiber Holder System
S122M8	Splicing for single fiber to 8-fiber ribbon using Fiber Holder System
S122M12	Splicing for single fiber to 12-fiber ribbon using Fiber Holder System

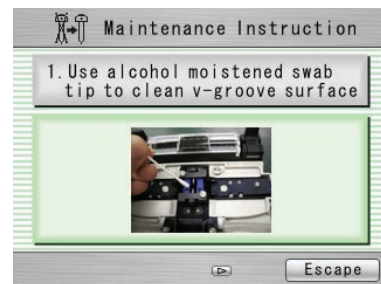

STANDARD PACKAGE:

P/N	Description	S122A-C-S0	S122A-C-S1	S122A-C-H0	S122A-C-H1	S122M4-C-S0	S122M4-C-S1	S122M4-C-H0	S122M4-C-H1	S122M8	S122M12
S122-A-A-0001	S122A Main Body	1	1	1	1						
S122-M-A-0001	S122M4 Main Body					1	1	1	1		
S122-M8-A-0001	S122M8 Main Body									1	
S122-M12-A-0001	S122M12 Main Body										1
S943	Battery	1	1	1	1	1	1	1	1	1	1
S122-X-A-0002	Soft Carrying Case	1	1			1	1				
S122-X-A-0003	Strap	1	1	1	1	1	1	1	1		
S122-X-A-0005	Hard Carrying Case for A/M4			1	1			1	1		
S122-X-A-0006	Cooling Tray	1	1	1	1	1	1	1	1	1	1
S122-X-A-0007 (pair)	Fiber Reformer for M4					1	1	1	1		
S122-X-A-0008 (pair)	Fiber Reformer for M8/M12									1	1
S122-X-A-0009	Hard Carrying Case for M8/M12									1	1
S709S-250 (pair)	250um Fiber Holder	1	1	1	1	1	1	1	1		
S709A-004 (pair)	4 fiber ribbon Fiber Holder					1	1	1	1		
S709A-008 (pair)	8 fiber ribbon Fiber Holder									1	
S709A-012 (pair)	12 fiber ribbon Fiber Holder										1
S957B	AC Adapter & Cord for A/M4	1		1		1	1	1	1		
S971	AC Adapter & Cord for M8/M12									1	1
S958B	Battery Charger	1				1	1	1	1	1	1
S959U (USB Type)	DC Adaptor		1		1		1		1	1	1
S966 (pair)	Electrode for A/M4	2	2	2	2	2	2	2	2		
S967 (pair)	Electrode for M8/M12									2	2
FTS-B291	Instruction Manual for A/M4	1	1	1	1	1	1	1	1		
FTS-B302	Instruction Manual for M8/M12									1	1
D5111	Electrode Sharpener	1	1	1	1	1	1	1	1	1	1

OPTIONAL ACCESSORIES:

S122-X-A-0002	Soft Carrying Case
S122-X-A-0004	Working Belt
S122-X-A-0005	Hard Carrying Case for A/M4
S122-X-A-0006	Cooling Tray
S122-X-A-0007 (pair)	Fiber Reformer for A/M4
S122-X-A-0008 (pair)	Fiber Reformer for M8/M12
S122-X-A-0009	Hard Carrying Case for M8/M12
S210	Fiber Stripper
S218R	Thermal Fiber Stripper
S325A	One-Action Precision Cleaver
S709S-250 (pair)	250um fiber holder
S709S-500 (pair)	500um fiber holder
S709S-900 (pair)	900um fiber holder
S709A-002 (pair)	2 fiber ribbon Fiber Holder
S709A-004 (pair)	4 fiber ribbon Fiber Holder
S709A-006 (pair)	6 fiber ribbon Fiber Holder
S709A-008 (pair)	8 fiber ribbon Fiber Holder
S709A-010 (pair)	10 fiber ribbon Fiber Holder
S709A-012 (pair)	12 fiber ribbon Fiber Holder
S959U (USB Type)	DC Adaptor
S943	Battery
S945	High Capacity Battery
S966 (2pcs)	Electrode for A/M4
S967 (2pcs)	Electrode for M8/M12



S122 Series