

Evolv™ Splitter Terminal with Pushlok™ Technology 4 port, unstubbed, 1x4 splitter

CORNING

Part Number:
DSH4F100D1NC000S0P

Evolv™ Splitter Terminals with Pushlok™ technology offers the smaller terminals for FTTX networks than ever before. The Pushlok connector is half the size of industry leading hardened connectors and enables terminal sizes up to one quarter of the size of traditional terminals. Designed for use in distributed split access networks, the terminal is small enough to be placed in existing handholes or pedestals where space is paramount, on building facades, or in aerial networks (pole- or strand-mount). Improved aesthetics improve end user adoption for facade applications. Unstubbed units have an input port for a single Pushlok drop assembly to provide signal source with subscriber adapter ports aligned in a single row on the right. Each port's corresponding release button is actuated to remove dust cap or drop. When installing drops, the keyed ports provide an audible and physical positive feedback minimizing technician variation and potential damage due to mishandling.

Features and Benefits

Pushlok™ cable assembly connector ports for customer drop terminations

Lower installation cost and increased speed of connection

Standard and integrated splitter terminal options

Solution supports various architecture types

Durability

100 lb cable tensile strength

Available stubbed or preterminated with OptiTip® multifiber connector technology

Compatible with existing FlexNAP™ installations

Small form factor optimises space in pedestals/handholes


Lower profile overall with drop entry ports on bottom

Ultrasonically welded housing

Eliminates water ingress potential and prevents unwanted entry in the field

Factory-terminated polished connectors

Eliminates loss associated with excess fusion splices

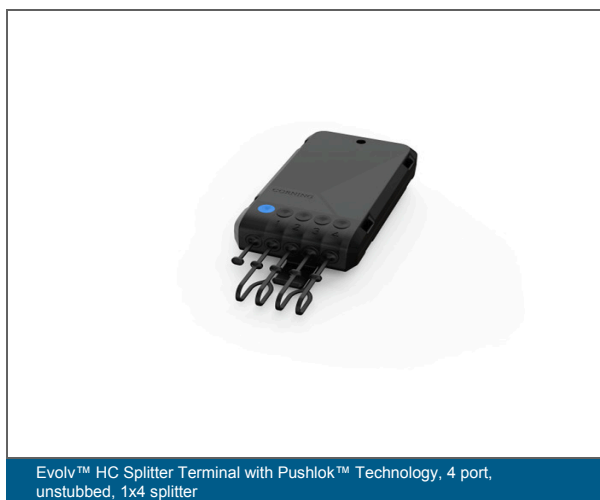

Evolv™ HC Splitter Terminal with Pushlok™ Technology, 4 port, unstubbed, 1x4 splitter

Evolv™ Splitter Terminal with Pushlok™ Technology 4 port, unstubbed, 1x4 splitter

CORNING

Specifications

Design - Adapter

Adapter type	Pushlok
--------------	---------

Design

Input fibre count	1
Fibre colouring	Blue, orange, green, brown
Fibres per port	1
Number of single-fibre ports, SC APC connector	4
Housing material	Plastic
Polish	APC
Locking availability	No
Sealing type	Welded
Housing colour	Black
Fibre Capacity	4
Number of ports	4

General Specifications

Product type	Terminals
Environment	Outdoor
Fibre category	ITU-TG.652.D (OS2)
Packaging	Individual Pack
Preconnectorized "Stubbed" hardware	No
Lockable	No
Mounting Type	Strand mount, Pole-mount, Wall-mount, Pedestal mount, Handhole mount
Splice option	No
Application	FTTx

Evolv™ Splitter Terminal with Pushlok™ Technology 4 port, unstubbed, 1x4 splitter

CORNING

Optical Specification - Hardware

Module Insertion Loss, Max	8 dB
Reflectance, maximum	55 dB

Mechanical Characteristics

Cold mate/demate	-40 °C
------------------	--------

Specifications - Connector B

Connector type	Pushlok
----------------	---------

Dimensions

Length	154 mm
Height	30 mm
Width	84 mm

Shipping Dimensions

Height	206 mm
Width	31 mm
Depth	84 mm

Connector Specs

Housing colour	Black
Housing material	Plastic
Polish	APC

Evolv™ Splitter Terminal with Pushlok™ Technology 4 port, unstubbed, 1x4 splitter

CORNING

Specifications - Connector A

Connector type	Pushlok
Housing colour	Black
Polish	APC
Housing material	Plastic
Endface type	APC
Insertion loss, max.	0.5 dB
Reflectance	> 65 dB
Insertion loss, typical	≤ 0.15 dB

Ordering Information

Product Number	DSH4F100D1NC000S0P
Weight	0.27 kg
Packaging method	Box
Shipping weight	0.27 kg
Width	84 mm
Depth	31 mm
Height	207 mm
Units per delivery	1/1

Environmental Conditions

Temperature range, operation	-40 °C to 85 °C
Temperature range, storage	-40 °C to 85 °C

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Evolv™ Splitter Terminal with Pushlok™ Technology 4 port, unstubbed, 1x4 splitter

CORNING



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: +49 30 5303 2335 • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2022 Corning Optical Communications. All rights reserved.