


Installation Cable Cat. 6A, U/UTP, 4P, 650 MHz, LSFRZH, grey, Ø 7.7mm, WARP, Dca, 500 m

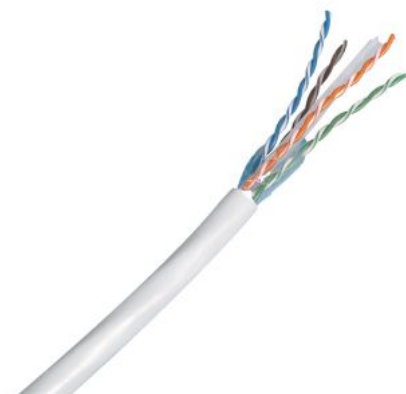

010.1560 / similar product

DESCRIPTION

Solid wire installation cable U/UTP Cat. 6A. 100 Ohm impedance. Data transmission frequencies of up to 650 MHz.

TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Aderart	Wire
Anzahl Adern	8
Kabel - Art	Single cable
Cable design	normal
Kategorie	Cat. 6A
Mantelmaterial	LSFRZH
Verseilung	4 pairs
Leiter	AWG 23
Schirmung	U/UTP
Kabeldurchmesser	Ø 7.7mm
Max. Testfrequenz	650
Cable length	500 m
PoE	Yes
PoE Level	4
CPR Klassifizierung	Dca
Standard	IEC 60332-1-2 ISO/IEC 11801 IEC 61156-5 TIA/EIA 568.2-D EN 50173-1
Armierung	No protection
Application	indoor use

MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Color	gray
Cable Length	500.0 m / 1640 ft

ENVIRONMENTAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Operation temperature	-20 °C to +60 °C / -4 °F to +140 °F